

## Multi-Channel Thermal Limit Monitor: Ideal For Multi-Zone Applications

The Watlow TLM series is a compact, cost-effective solution for multi-channel, redundant temperature monitoring. Each TLM has eight channels to continuously monitor thermocouples, RTDs, or thermal switches, making it ideal for multi-zone applications. Choose an individual temperature limit for each channel from the standard list or consult the factory for other limits.

The TLM is equipped with flexible interlocks, which are designed to interface with redundant controls. The alarms latch and require operator intervention to clear for process and equipment protection. Semiconductor capital equipment OEMs will find these features ideal for meeting SEMI S2 safety guidelines.

The TLM is compact and easy to install on a panel or a DIN-rail. No cutout is required, reducing installation and fabrication costs. Troubleshooting is simplified through a self-test diagnostics input, which simulates the alarm state. The TLM-8 is FM approved as a temperature limit switch, bears the CE mark (LVD and EMC Directives) and is UL® and C-UL® listed.

### Applications

- Any process requiring multi-channel redundant temperature monitoring
- Semiconductor capital equipment requiring SEMI S2
- Electronics packaging equipment
- Plastic injection molding and extrusion equipment

UL® and C-UL® are registered trademarks of Underwriter's Laboratories, Inc.

Your Authorized Watlow Distributor is:



### Features and Benefits

#### Multi-channel monitoring

- Eight channels in one package make the TLM ideal for multi-zone applications

#### Multiple sensor types

- TLM accepts six thermocouple types, RTDs and thermal switches (one sensor type per TLM unit)

#### Selectable alarm limits

- TLM-8 can be ordered with a different temperature limit on each channel

#### Compact, easy to install, sub-panel mounting

- Reduces installation time

#### Flexible interlocks

- Interfaces with redundant controls; ideal for SEMI S2 applications

#### Self-test diagnostics

- Simplifies troubleshooting

#### Latching alarms

- Protects process and equipment

#### CE, UL®, C-UL® and Factory Mutual (FM) Approvals

- Global acceptance for safety and EMC compliance



ISO 9001

WIN-TLM-1107

To be automatically connected to the nearest North American Technical and Sales Office:

**1-800-WATLOW2 • [www.watlow.com](http://www.watlow.com) • [info@watlow.com](mailto:info@watlow.com)**

**International Technical and Sales Offices:** Australia, +61-3-9335-6449 • China, +86-21-3950-9510 • France, +33 (0) 3073-2425 • Germany, +49 (0) 7253-9400-0 • Italy, +39 (0) 2 458-8841 • Japan, +81-3-3518-6630 • Korea, +82-2-575-9804 • Malaysia, +60-3-7980-7741 • Mexico, +52 (442) 217-6235 • Shanghai, +86-21-3950-9504 • Singapore, +65-6777-1266 • Spain, +34 91 675 1292 • Sweden, +46 35-27-11-66 • Taiwan, +886-7-288-5168 • United Kingdom, +44 (0) 115-964-0777

# Specifications

## Analog Inputs

- Number of sensor inputs: 8

## Sensor Inputs (Trip Point Ranges)

- RTD 100Ω, platinum, 2-wire (DIN Curve: -100 to 850°C)
- Thermal switch
- Type E T/C (100 to 801°C)
- Type J T/C (100 to 754°C)
- Type K T/C (100 to 1205°C)
- Type R T/C (500 to 1720°C)
- Type S T/C (500 to 1711°C)
- Type T T/C (100 to 384°C)

## Accuracy

- Part numbers starting with "TLME": ±5 percent of trip point
- Part numbers starting with "TLMC": see table below

## TLMC Accuracy Specification

Sensor(s)	Trip Point Accuracy Ambient: 15 to 35°C	Trip Point Accuracy Ambient: 0 to 60°C
J, K, E, T, RTD	±0.5% of trip point ±2°C	±0.5% of trip point ±4°C
S, R	±0.5% of trip point ±3°C	±0.5% of trip point ±5°C

## Repeatability

- Better than 5°C or accuracy for trip point, whichever is less

## Trip Point Chart - (see Ordering Information, Option 4)

Temperature	Trip Point	Temperature	Trip Point
<b>RTD</b>			
Unused Input	A	603°C (1117°F)	L
103°C (217°F)	B	651°C (1204°F)	M
121°C (250°F)	C	701°C (1294°F)	N
151°C (304°F)	D	753°C (1387°F)	O
215°C (419°F)	E	807°C (1485°F)	P
324°C (615°F)	F	851°C (1564°F)	Q
404°C (759°F)	G	907°C (1665°F)	R
478°C (892°F)	H	952°C (1746°F)	S
584°C (1083°F)	I	998°C (1828°F)	T
708°C (1306°F)	J	1057°C (1935°F)	U
824°C (1515°F)	K	1101°C (2014°F)	V
Thermostat	K	1157°C (2115°F)	W
		1205°C (2201°F)	X
<b>Type E T/C</b>			
Unused Input	A	<b>Type K T/C (con't)</b>	
101°C (214°F)	B	603°C (1117°F)	L
202°C (396°F)	C	651°C (1204°F)	M
302°C (576°F)	D	701°C (1294°F)	N
403°C (756°F)	E	753°C (1387°F)	O
502°C (936°F)	F	807°C (1485°F)	P
600°C (1112°F)	G	851°C (1564°F)	Q
702°C (1296°F)	H	907°C (1665°F)	R
801°C (1474°F)	I	952°C (1746°F)	S
<b>Type J T/C</b>			
Unused Input	A	998°C (1828°F)	T
100°C (212°F)	B	1057°C (1935°F)	U
152°C (307°F)	C	1101°C (2014°F)	V
202°C (396°F)	D	1157°C (2115°F)	W
251°C (484°F)	E	1205°C (2201°F)	X
302°C (576°F)	F	<b>Type R T/C</b>	
350°C (662°F)	G	Unused Input	A
402°C (756°F)	H	501°C (934°F)	B
450°C (842°F)	I	602°C (1116°F)	C
502°C (936°F)	J	708°C (1306°F)	D
554°C (1027°F)	K	800°C (1472°F)	E
600°C (1112°F)	L	800°C (1472°F)	E
653°C (1207°F)	M	903°C (1657°F)	F
704°C (1299°F)	N	999°C (1830°F)	G
754°C (1389°F)	O	1100°C (2012°F)	H
<b>Type K T/C</b>			
Unused Input	A	1206°C (2203°F)	I
100°C (212°F)	B	1306°C (2383°F)	J
150°C (302°F)	C	1410°C (2570°F)	K
200°C (392°F)	D	1497°C (2727°F)	L
252°C (486°F)	E	1593°C (2899°F)	M
303°C (577°F)	F	1720°C (3128°F)	N
353°C (667°F)	G	<b>Type S T/C</b>	
401°C (754°F)	H	Unused Input	A
455°C (851°F)	I	506°C (943°F)	B
504°C (939°F)	J	601°C (1114°F)	C
556°C (1033°F)	K	700°C (1292°F)	D
		810°C (1490°F)	E
		902°C (1656°F)	F
		1005°C (1841°F)	G
		1110°C (2030°F)	H
		1210°C (2210°F)	I
		1313°C (2395°F)	J
		1404°C (2559°F)	K
		1500°C (2732°F)	L
		1600°C (2912°F)	M
		1711°C (3112°F)	N
		<b>Type T T/C</b>	
		Unused Input	A
		100°C (212°F)	B
		202°C (396°F)	C
		291°C (556°F)	D
		384°C (723°F)	E

## Digital Inputs

- Alarm acknowledge digital input: 5-30V=(dc), optically isolated
- Alarm simulation digital input: 5-30V=(dc), optically isolated

## Electromechanical Alarm Relays

- Contact arrangement: open in power off condition
- Contact action: latch open in alarm condition
- Maximum contact rating: 1A @ 30V=(dc)

## Indicator Lights

- 8 individual red alarm status indicator lights
- 1 green supply power indicator light

## Dimensions

- 9.30 in. (236 mm) x 3.61 in. (92 mm) x 1.87 in. (48 mm) depth; add 0.75 in. (20 mm) to depth for DIN-rail mount

## Power Requirements

- 12-24V=(dc), 3.2 watts, class 2 power supply


## Environmental

- Temperature: 0 to 60°C (operating); -20 to 100°C (storage)
- Relative humidity: 0-95 percent, non-condensing

## Agency Approvals/Compliance

- UL®, C-UL® listed (File No. E185611)  
Process Control Equipment UL® 61010  
Process Control Equipment C22.2 #61010-1
- FM  
Temperature Limit Switches-Non Indicating Class 3545  
Temperature Supervisory Switch Class 3545
- CE  
Low Voltage Directive (LVD) 73/23/EEC  
Electromagnetic Compatibility Directive (EMC) 2004/108/EC

## Ordering Information

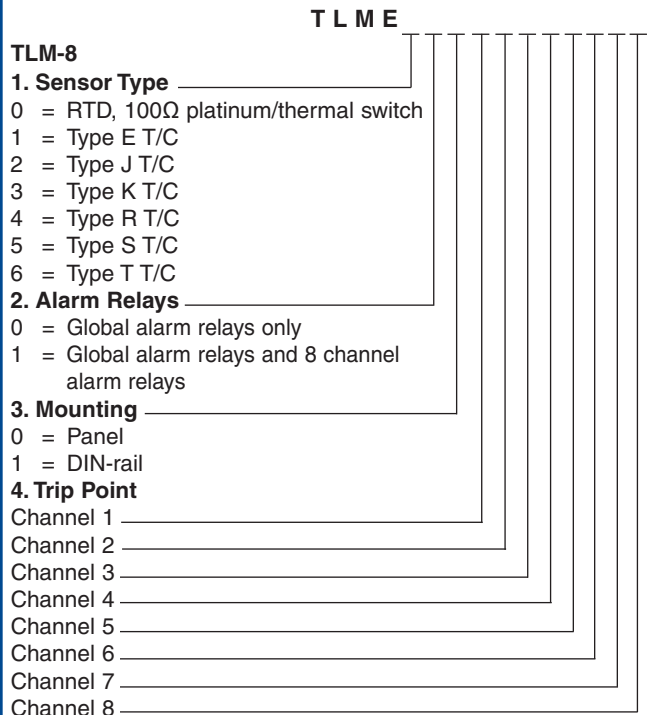

## Ordering Instructions:

1. Choose the desired sensor type.
2. Choose alarm relay option.
3. Choose mounting option.
4. Based on sensor choice, use the Trip Point Chart and choose the desired alarm temperature for each channel.

**Note:** For other trip points and higher trip point accuracy, consult your supplier regarding the TLMC.