


DATE: _____ CUSTOMER: _____
 PHONE: _____ CONTACT: _____
 FAX: _____ EMAIL: _____

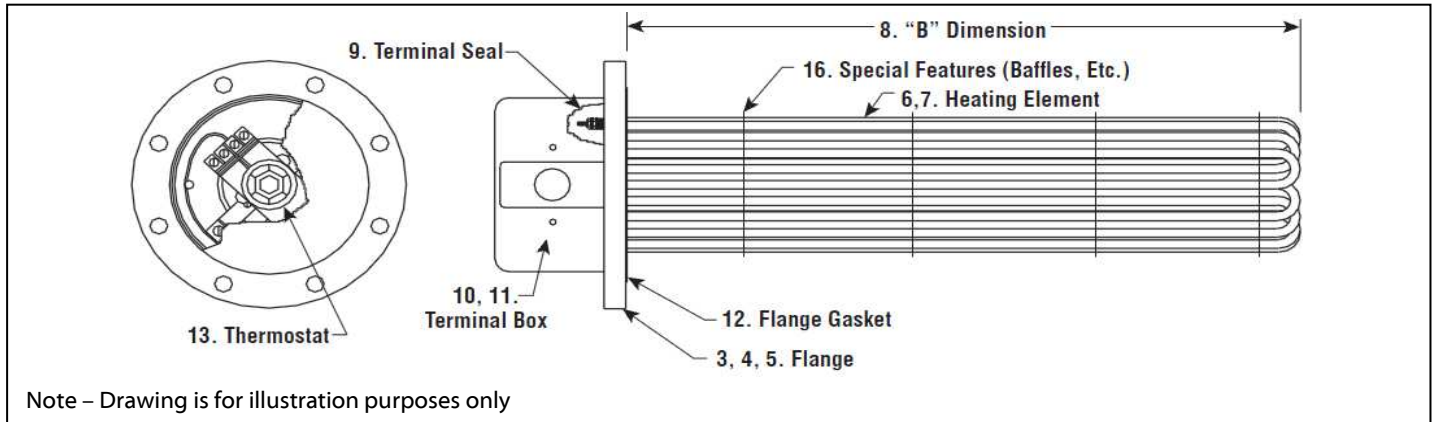

Operating Conditions

APPLICATION (Describe in Detail):

MATERIAL HEATING:	OPERATING TEMPERATURE:	<input type="checkbox"/> °F <input type="checkbox"/> °C
OPERATING PRESSURE: PSIG	AMBIENT TEMPERATURE:	<input type="checkbox"/> °F <input type="checkbox"/> °C
HAZARDOUS ENVIRONMENT: CLASS: DIVISION: GROUP:		<input type="checkbox"/> INDOOR <input type="checkbox"/> OUTDOOR

Heater Specifications (Check All That Apply)

RATING:	VOLTS	kW	PH	kW/CIRCUIT	NO. CIRCUITS: <input type="checkbox"/> STD <input type="checkbox"/> OTHER:
FLANGE SIZE (IN.)	<input type="checkbox"/> 3 <input type="checkbox"/> 4 <input type="checkbox"/> 5 <input type="checkbox"/> 6 <input type="checkbox"/> 8 <input type="checkbox"/> 10 <input type="checkbox"/> 12 <input type="checkbox"/> 14 <input type="checkbox"/> 16 <input type="checkbox"/> OTHER:				
FLANGE MATERIAL:	<input type="checkbox"/> STEEL <input type="checkbox"/> BRASS <input type="checkbox"/> 304 S/S <input type="checkbox"/> 316 S/S <input type="checkbox"/> OTHER:				
FLANGE RATING:	<input type="checkbox"/> CLASS 150 <input type="checkbox"/> CLASS 300 <input type="checkbox"/> OTHER:				
SHEATH MATERIAL:	<input type="checkbox"/> STEEL <input type="checkbox"/> COPPER <input type="checkbox"/> 304 S/S <input type="checkbox"/> 316 S/S <input type="checkbox"/> INCOLOY <input type="checkbox"/> OTHER:				
LENGTH (INCHES):	IMMERSION LENGTH		OVERALL LENGTH		
TERMINAL SEALS:	<input type="checkbox"/> STD EPOXY (194°F) <input type="checkbox"/> SILICONE RESIN (221°F) <input type="checkbox"/> LAVACONE (221°F)	<input type="checkbox"/> MED EPOXY (356°F) <input type="checkbox"/> SILICONE FLUID (392°F) <input type="checkbox"/> ULTRAGUARD (707°F)	<input type="checkbox"/> HIGH TEMP EPOXY (450°F) <input type="checkbox"/> SILICONE RTV (500°F) <input type="checkbox"/> HIGH TEMP CERAMIC (2800°F)		
TERMINAL BOX:	<input type="checkbox"/> GENERAL PURPOSE <input type="checkbox"/> MOISTURE RESISTANT	<input type="checkbox"/> EXPLOSION/MOISTURE RESISTANT			
STANDOFFS:	<input type="checkbox"/> NONE <input type="checkbox"/> 4" <input type="checkbox"/> 6" <input type="checkbox"/> OTHER:	GASKET: <input type="checkbox"/> STD <input type="checkbox"/> SPIRAL			
THERMOSTAT:	<input type="checkbox"/> NONE <input type="checkbox"/> 0-100°F <input type="checkbox"/> 60-250°F <input type="checkbox"/> 200-550°F	ELECTRICAL CODES: <input type="checkbox"/> UL <input type="checkbox"/> CSA			
ASME REQUIRED:	<input type="checkbox"/> NONE <input type="checkbox"/> YES: <input type="checkbox"/> DESIGN ONLY <input type="checkbox"/> DESIGN & CERTIFY With: <input type="checkbox"/> Sec I <input type="checkbox"/> Sec IV <input type="checkbox"/> Sec VIII				
APPROVALS:	<input type="checkbox"/> NONE <input type="checkbox"/> UL LISTED <input type="checkbox"/> CSA CERTIFIED <input type="checkbox"/> OTHER:				
OTHER FEATURES:	<input type="checkbox"/> NONE <input type="checkbox"/> T/C on Sheath – Type: <input type="checkbox"/> BAFFLES <input type="checkbox"/> OTHER:				