


DATE: _____ CUSTOMER: _____
 PHONE: _____ CONTACT: _____
 FAX: _____ EMAIL: _____

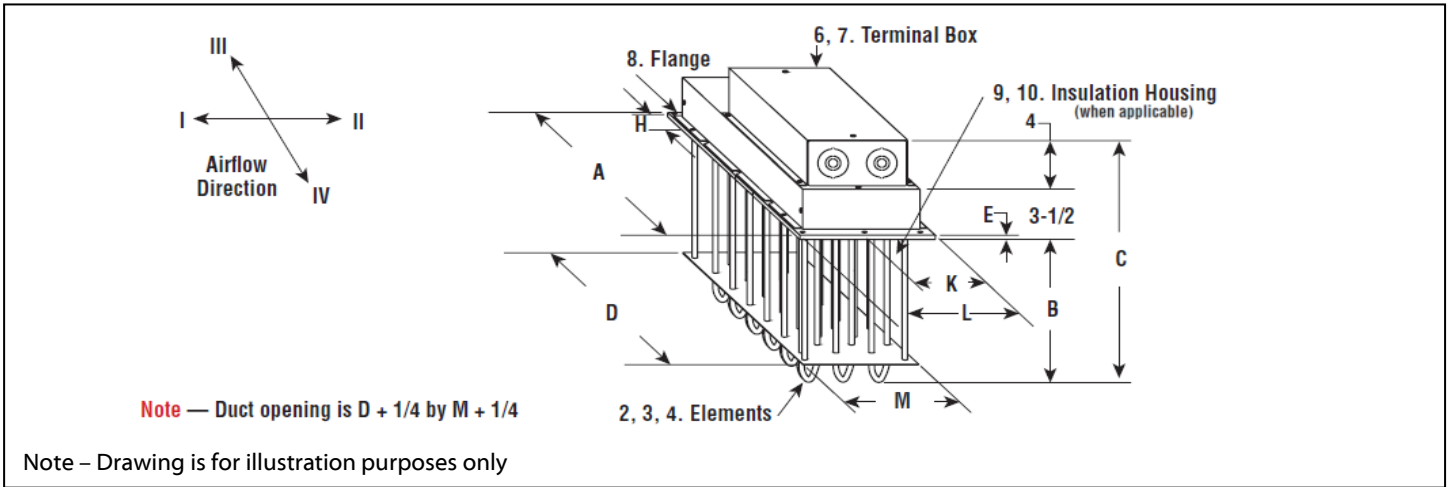

Operating Conditions

APPLICATION (Describe in Detail)			
INLET AIR TEMP:	°F	OUTLET AIR TEMP:	°F
OPERATING PRESSURE:	PSIG	<input type="checkbox"/> INDOOR	<input type="checkbox"/> OUTDOOR
DUCT DIMENSIONS:	LENGTH (Inches)	WIDTH (Inches)	AIR FLOW DIRECTION: <input type="checkbox"/> I <input type="checkbox"/> II <input type="checkbox"/> III <input type="checkbox"/> IV

Heater Specifications

RATING:	VOLTS	kW	PH	kW/CIRCUIT	NO. CIRCUITS:	<input type="checkbox"/> STD	<input type="checkbox"/> OTHER:
HEATING ELEMENTS:	<input type="checkbox"/> TUBULAR (Standard)	<input type="checkbox"/> FINNED TUBULAR					
SHEATH MATERIAL:	Tubular:	<input type="checkbox"/> INCOLOY	<input type="checkbox"/> 304 S/S	<input type="checkbox"/> 316 S/S	<input type="checkbox"/> OTHER:		
	Finned:	<input type="checkbox"/> STEEL	<input type="checkbox"/> 304 S/S	<input type="checkbox"/> CER STEEL	<input type="checkbox"/> MONEL	<input type="checkbox"/> OTHER:	
TERMINAL SEALS:	<input type="checkbox"/> STD EPOXY (194°F)	<input type="checkbox"/> MED EPOXY (356°F)		<input type="checkbox"/> HIGH TEMP EPOXY (450°F)			
	<input type="checkbox"/> SILICONE RESIN (221°F)	<input type="checkbox"/> SILICONE FLUID (392°F)		<input type="checkbox"/> SILICONE RTV (500°F)			
	<input type="checkbox"/> LAVACONE (221°F)	<input type="checkbox"/> ULTRAGUARD (707°F)		<input type="checkbox"/> HIGH TEMP CERAMIC (2800°F)			
TERMINAL BOX:	Constr:	<input type="checkbox"/> GENERAL	<input type="checkbox"/> MOISTURE RESISTANT		<input type="checkbox"/> EXPLOSION/MOISTURE RESISTANT		
	Material:	<input type="checkbox"/> AL. STEEL	<input type="checkbox"/> 304 S/S	<input type="checkbox"/> 316 S/S	<input type="checkbox"/> OTHER:		
FLANGE MATERIAL:	<input type="checkbox"/> STEEL (Standard)	<input type="checkbox"/> 304 S/S	<input type="checkbox"/> 316 S/S				
INSULATION HOUSING:	<i>Below Flange:</i>	<input type="checkbox"/> YES	<input type="checkbox"/> NO		<i>Height:</i>	inches(3-5/8" Standard)	
	<i>Material:</i>	<input type="checkbox"/> 304 S/S	<input type="checkbox"/> 316 S/S		<input type="checkbox"/> OTHER:		
THERMOCOUPLE:	<input type="checkbox"/> NONE	<input type="checkbox"/> WELDED TO SHEATH		<input type="checkbox"/> TYPE J	<input type="checkbox"/> TYPE K	<input type="checkbox"/> OTHER:	
HEATER DIMENSIONS:	A:	B:	C:	D:	E:	H:	K: L: M:
APPROVALS:	<input type="checkbox"/> NONE	<input type="checkbox"/> UL COMP RECOGNIZED		<input type="checkbox"/> CSA CERTIFIED		<input type="checkbox"/> OTHER:	
OTHER FEATURES:	<input type="checkbox"/> NONE	<input type="checkbox"/> OTHER:					