


Screw Plug/Flanged Immersion Heaters

- **Metal Immersion Heaters**
 - ✓ .5 to 54 kW
 - ✓ Heavy-duty, Long-lasting Construction
 - ✓ For Plating Tanks and Rinse Tanks
- **Fluoropolymer Sheathed Immersion Heaters**
 - ✓ .5 to 27 kW
 - ✓ Non-contaminating, Fluoropolymer Sheathed Stainless Steel Element
 - ✓ Lightweight, Non-floating Construction
- **Quartz Immersion Heaters**
 - ✓ .5 to 30 kW
 - ✓ For Plating Tanks and Pickling
 - ✓ Heavy-duty, Long-lasting Construction

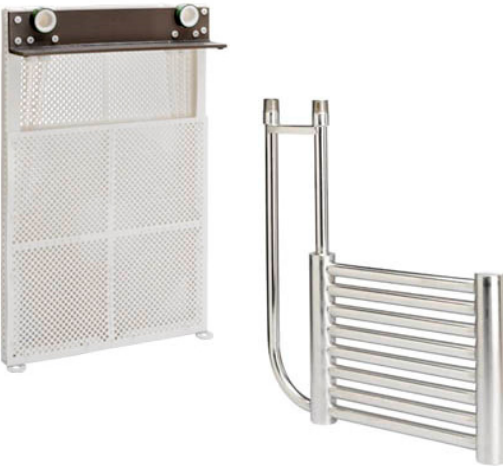

Heat Exchangers

- **Metal Heat Exchangers**
 - ✓ .75/ft² to 89.8/ft² Exchange Area
 - ✓ For Plating Tanks and Other Aqueous Solutions
 - ✓ Available in Horizontal or Vertical Configurations
- **Fluoropolymer Exchange Heaters**
 - ✓ For Heating and Cooling Deionized Water and Most Acid and Alkaline Solutions
 - ✓ Compact, Low-profile Design with Integral Perforated Guard

Electric Immersion Heaters

- ✓ 1 to 270 kW
- ✓ ½" to 2 ½" NPT Screw Plugs Available
- ✓ 3" to 14" Diameter Flange Sizes Available
- ✓ Heavy-duty, Long-lasting Construction
- ✓ SmartOne® heating – with No Thermal Protection Required

