


DATE: \_\_\_\_\_ CUSTOMER: \_\_\_\_\_  
 PHONE: \_\_\_\_\_ CONTACT: \_\_\_\_\_  
 FAX: \_\_\_\_\_ EMAIL: \_\_\_\_\_

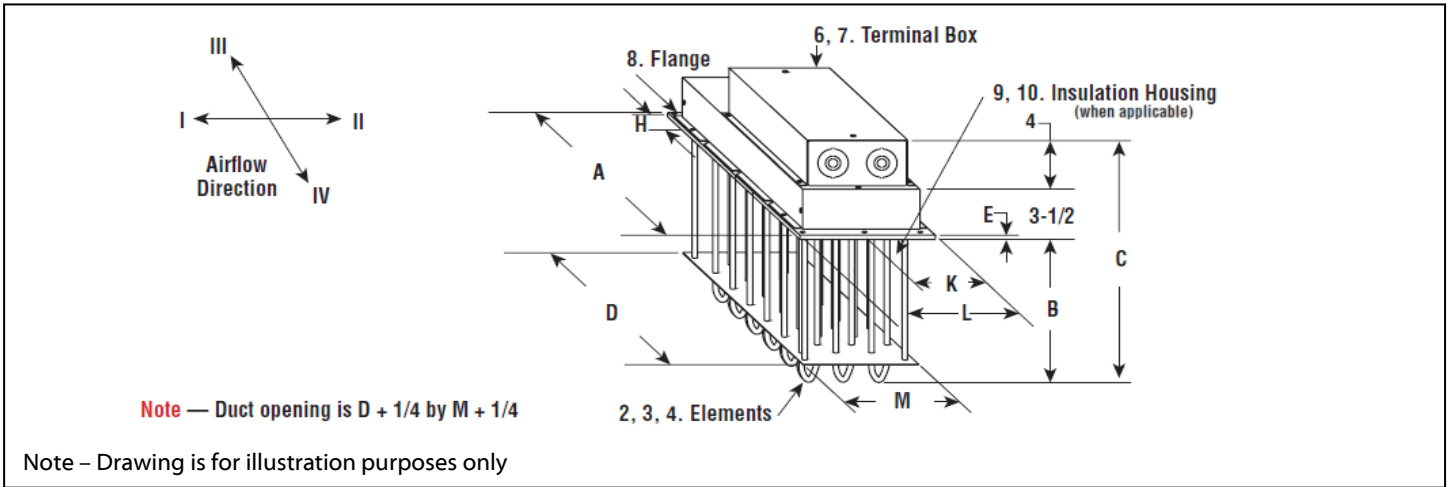

### Operating Conditions

APPLICATION (Describe in Detail)			
INLET AIR TEMP:	°F	OUTLET AIR TEMP:	°F
OPERATING PRESSURE:	PSIG	<input type="checkbox"/> INDOOR	<input type="checkbox"/> OUTDOOR
DUCT DIMENSIONS:	LENGTH (Inches)	WIDTH (Inches)	AIR FLOW DIRECTION: <input type="checkbox"/> I <input type="checkbox"/> II <input type="checkbox"/> III <input type="checkbox"/> IV

### Heater Specifications

RATING:	VOLTS	kW	PH	kW/CIRCUIT	NO. CIRCUITS:	<input type="checkbox"/> STD	<input type="checkbox"/> OTHER:		
HEATING ELEMENTS:	<input type="checkbox"/> TUBULAR (Standard)	<input type="checkbox"/> FINNED TUBULAR							
SHEATH MATERIAL:	<b>Tubular:</b>	<input type="checkbox"/> INCOLOY	<input type="checkbox"/> 304 S/S	<input type="checkbox"/> 316 S/S	<input type="checkbox"/> OTHER:				
	<b>Finned:</b>	<input type="checkbox"/> STEEL	<input type="checkbox"/> 304 S/S	<input type="checkbox"/> CER STEEL	<input type="checkbox"/> MONEL	<input type="checkbox"/> OTHER:			
TERMINAL SEALS:	<input type="checkbox"/> STD EPOXY (194°F)	<input type="checkbox"/> MED EPOXY (356°F)		<input type="checkbox"/> HIGH TEMP EPOXY (450°F)					
	<input type="checkbox"/> SILICONE RESIN (221°F)	<input type="checkbox"/> SILICONE FLUID (392°F)		<input type="checkbox"/> SILICONE RTV (500°F)					
	<input type="checkbox"/> LAVACONE (221°F)	<input type="checkbox"/> ULTRAGUARD (707°F)		<input type="checkbox"/> HIGH TEMP CERAMIC (2800°F)					
TERMINAL BOX:	<b>Constr:</b>	<input type="checkbox"/> GENERAL	<input type="checkbox"/> MOISTURE RESISTANT		<input type="checkbox"/> EXPLOSION/MOISTURE RESISTANT				
	<b>Material:</b>	<input type="checkbox"/> AL. STEEL	<input type="checkbox"/> 304 S/S	<input type="checkbox"/> 316 S/S	<input type="checkbox"/> OTHER:				
FLANGE MATERIAL:	<input type="checkbox"/> STEEL (Standard)	<input type="checkbox"/> 304 S/S	<input type="checkbox"/> 316 S/S						
INSULATION HOUSING:	<b>Below Flange:</b>	<input type="checkbox"/> YES	<input type="checkbox"/> NO		<b>Height:</b>	inches(3-5/8" Standard)			
	<b>Material:</b>	<input type="checkbox"/> 304 S/S	<input type="checkbox"/> 316 S/S		<input type="checkbox"/> OTHER:				
THERMOCOUPLE:	<input type="checkbox"/> NONE	<input type="checkbox"/> WELDED TO SHEATH		<input type="checkbox"/> TYPE J	<input type="checkbox"/> TYPE K	<input type="checkbox"/> OTHER:			
HEATER DIMENSIONS:	A:	B:	C:	D:	E:	H:	K:	L:	M:
APPROVALS:	<input type="checkbox"/> NONE	<input type="checkbox"/> UL COMP RECOGNIZED		<input type="checkbox"/> CSA CERTIFIED		<input type="checkbox"/> OTHER:			
OTHER FEATURES:	<input type="checkbox"/> NONE	<input type="checkbox"/> OTHER:							